

FORM PTO-1390
(REV. 5-93)U.S. DEPARTMENT OF COMMERCE
PATENT AND TRADEMARK OFFICE

ATTORNEY'S DOCKET NUMBER

ASA-883

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)U.S. APPLICATION NO. **09/555010** (known as 37 CFR 1.5)

International Application No.

PCT/JP97/04356

International Filing Date

November 28, 1997

Priority Date Claimed

Title of Invention:

HIGH FREQUENCY POWER AMPLIFYING CIRCUIT, AND
MOBILE COMMUNICATION APPARATUS USING IT

Applicant(s) for DO/EO/US

SEE ATTACHED LIST (Y. NUNOGAWA et al)



Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
6. ☐ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☐ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☒ Other items or information:

[x] THIS APPLICATION IS BEING FILED WITHOUT AN ENGLISH LANGUAGE TRANSLATION OF THE INTERNATIONAL APPLICATION, AND WITHOUT AN EXECUTED DECLARATION, which will both be later filed.

[x] LIST OF INVENTORS' NAMES AND ADDRESSES.

005060 "0959560

U.S. Application No. (if known, see 37 CFR 1.5)

International Application No.

Attorney's Docket Number

09/555010

PCT/JP97/04356

ASA-883

17. ☒ The following fees are submitted:

CALCULATIONS PTO USE ONLY

Basic National Fee (37 CFR 1.492 (a)(1)-(5)):

Search Report has been prepared by the EPO or JPO \$840.00
 International preliminary examination fee paid to USPTO (37 CFR 1.482) \$670.00
 No international preliminary examination fee (37 CFR 1.482)
 but international search fee paid to USPTO (37 CFR 1.445 (A)(2)) \$760.00
 Neither international examination fee (37 CFR 1.482) nor
 international search fee (37 CFR 1.445(A)(2)) paid to USPTO \$ 970.00
 International preliminary examination fee paid to USPTO (37 CFR 1.482)
 and all claims satisfied provisions of PCT Article 33(2) to (4) \$ 96.00

ENTER APPROPRIATE BASIC FEE AMOUNT = \$ 840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☒ 30
 months from the earliest claimed priority date (37 CFR 1.492(e)). + \$ 130.00

Claims	Number Filed	Number Extra	Rate		
Total	15 -20 =	0	x \$18.00	\$	0.00
Independent	3 - 3 =	0	x \$78.00	\$	0.00
Multiple dependent claim(s) (if applicable)			+ \$260.00	\$	0.00

TOTAL OF ABOVE CALCULATIONS = \$ 970.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement
 must also be filed. (Note 37 CFR 1.9, 1.27, 1.28).

\$ 0.00

SUBTOTAL = \$ 970.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☒ 30
 months from the earliest claimed priority date (37 CFR 1.492(f)). + \$ 130.00

TOTAL NATIONAL FEE = \$ 1,100.00

Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be
 accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property. + \$ 0.00

TOTAL FEES ENCLOSED = \$ 1,100.00

Amount to be:

Refunded \$

Charged \$

a. ☒ A check in the amount of \$ 1,100.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. 02-1540 in the amount of \$ _____ to cover the above fees.
 A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
 overpayment to Deposit Account No. 02-1540. A duplicate copy of this sheet is enclosed.

Note: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive
 (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

BEALL LAW OFFICES
 104 East Hume Avenue
 Alexandria, Virginia 22301
 (703) 684 -1120


 Signature
 John R. Mattingly
 Name

30,293

Registration Number

09/555010

1

09/555010

DESCRIPTION

HIGH FREQUENCY POWER AMPLIFYING CIRCUIT, AND MOBILE
COMMUNICATION APPARATUS USING IT

TECHNICAL FIELD

The present invention relates to a high
frequency power amplifying circuit and a mobile
communication apparatus using it, and more particularly
5 to a technology for use in the control of high
frequency power in a battery-powered high frequency
power amplifying circuit and a mobile communication
apparatus using it.

10 BACKGROUND ART

A high frequency power amplifying circuit (RF
power amplifying IC) for use in a mobile communication
apparatus is described "Nikkei Electronics", Nikkei
McGraw-Hill Company, pp. 115-126, 27th January, 1997.

15 To detect a high frequency power for
transmission power control in a mobile communication
apparatus, a power coupler is used or the power current
of the high frequency power amplifying circuit is
sensed. When the power coupler is used, a part of the
20 transmission radio wave is drawn for detection.
Therefore, the insertion loss becomes as large as 0.2 -
0.3 dB, decreasing the transmission efficiency. When
the power current is sensed, a resistor element
inserted, in series, into the power supply line of the

0055010-005500

high frequency power amplifying circuit decreases the power voltage when the output power is large. This decreases the battery voltage efficiency and shortens the battery life. Another problem in both sensing
5 methods described above is that, in an area where the output power is low, the sense output decreases accordingly and, therefore, low-power control cannot be made precisely.

Therefore, it is an object of the present
10 invention to provide a high frequency power amplifying circuit, capable of precisely detecting the power in a wide power range while maintaining high transmission efficiency, and a mobile communication apparatus using the circuit. It is another object of the present
15 invention to provide a high frequency power amplifying circuit capable of operation even at a low voltage and a mobile communication apparatus using it. The above and other objects and the novel features of the present invention will become apparent from the description of
20 the specification and the attached drawings.

DISCLOSURE OF INVENTION

A high frequency power amplifying circuit according to the present invention uses a first
25 amplifying element and a second amplifying element of the same structure as the above first amplifying element and being reduced to 1/M in element size. The above first amplifying element and the second

0055010.090500

amplifying element are supplied with the same bias voltage from a power control circuit, and the power output of the above first amplifying element is judged based on the output current outputted from the output
5 terminal of the above second amplifying element.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a block diagram showing one embodiment of a mobile communication apparatus using a
10 high frequency power amplifying circuit according to the present invention.

FIG. 2 is a basic circuit diagram showing one embodiment of the high frequency power amplifying circuit according to the present invention.

15 FIG. 3 is a basic circuit diagram showing another embodiment of the high frequency power amplifying circuit according to the present invention.

FIG. 4 is a characteristics diagram, used to describe an example of the operation of the high
20 frequency power amplifying circuit according to the present invention, showing the relation between the output power and detected current.

FIG. 5 is a characteristics diagram, used to describe another example of the operation of the high
25 frequency power amplifying circuit according to the present invention, showing the relation between the output power and detected current.

FIG. 6 is a circuit diagram showing yet

005060" 07055960

another embodiment of the high frequency power
amplifying circuit according to the present invention.

FIG. 7 is a basic configuration diagram
showing another embodiment of the high frequency power
5 amplifying circuit according to the present invention.

FIG. 8 is a circuit diagram showing yet
another embodiment of the high frequency power
amplifying circuit according to the present invention.

FIG. 9 is a circuit diagram showing yet
10 another embodiment of the high frequency power
amplifying circuit according to the present invention.

FIG. 10 is a characteristics diagram, used to
describe an example the operation of the high frequency
power amplifying circuit according to the present
15 invention, showing the relation between the output
power and detected current.

FIG. 11 is a circuit diagram showing yet
another embodiment of the high frequency power
amplifying circuit according to the present invention.

20 FIG. 12 is a block diagram showing yet
another embodiment of the high frequency power
amplifying circuit according to the present invention.

FIG. 13 is an entire block diagram showing an
embodiment of a mobile communication apparatus using
25 the high frequency power amplifying circuit according
to the present invention.

BEST MODE FOR CARRYING OUT THE INVENTION

005060" 07055560

Some embodiments of the present invention will be described in detail with reference to the attached drawings.

FIG. 1 is a block diagram showing an embodiment of a mobile communication apparatus using a high frequency power amplifying circuit according to the present invention. Though not necessarily required, a lithium ion battery is used for the power supply to the mobile communication apparatus. As it is well known, the voltage of the lithium ion battery is as low as 3.6V. To obtain a high frequency power amplifying output at this low voltage and to minimize the power consumption, a power control circuit and a circuit for sensing a high frequency power output described below are provided.

An input signal Pin is supplied to an input terminal of an input stage amplifier (1). At an output of the input stage amplifier (1) is provided a power distribution circuit (2). The power distribution circuit (2) distributes a signal output from the input stage amplifier (1) to a plurality of output stage amplifiers (3-1) to (3-N) and, at the same time, performs impedance matching between the stages.

Output terminals of the output stage amplifiers (3-1) to (3-N) described above are connected to an output matching circuit (6). The output matching circuit (6) also has a function to combine output signals from the output stage amplifiers (3-1) to (3-

N). A signal output from the output matching circuit (6) is sent to an antenna via a duplexer (7) for transmission as radio waves.

A gain control circuit (4) generates a bias voltage for controlling gains of the input stage amplifier (1) and the output stage amplifiers (3-1) to (3-N).

An input signal received by the antenna is sent to a receiving circuit (10) via the duplexer (7).
 10 The received signal includes a signal from a sending apparatus and a control signal indicating an electric field strength of the radio wave from a base station. The receiving circuit (10) decodes the control signal, generates power control signals (1) to (N), and sends
 15 them to power control amplifiers (8-1) - (8-N).

A power sense element composed of an amplifier element, whose size is $1/M$ of the amplifier element generating the output signal P_{out} , is provided in each of the output stage amplifiers (3-1) to (3-N).
 20 The bias voltage described above is applied to the input of the power sense element to control the gain of the output, though not limited thereto.

Output signals from the power sense elements are combined by a detected-current combining circuit
 25 (5). The resulting combination signal is then sent to the power control amplifier (8-1) - (8-N) as a power sense output.

As will be described later, the input stage

005060"0F094960

amplifier (1) and the output stage amplifiers (3-1) to (3-N) include amplifying MOSFETs in a grounded-source configuration with their gates serving as inputs. The output signals are obtained from their drains.

5 The input stage amplifier (1) and the output stage amplifiers (3-1) to (3-N) perform class "AB" amplification. They act as variable gain amplifiers that increase the mutual conductance g_m and the gain as the gate voltage increases. In the description of the
10 present invention, the MOSFET is intended to mean not only metal oxide field effect transistors but also metal insulator semiconductor (MIS) FETs. The gate electrode of the MOSFET and the MISFET includes not only metal but also conductive polysilicon for high
15 frequency operation.

 This embodiment is intended for the GSM(Global System for Mobile Communication) system. The GSM system, well known as the European standard for digital mobile telephones, uses the TDMA(time division
20 multiple access) and FDD(frequency division duplex) technologies at a carrier frequency of 900 MHz. For modulation, GMSK(Gaussian filtered minimum shift keying) is employed.

 The GSM system, in which each two base
25 stations can be up to 10 miles (about 16 Km) apart, requires that the output be controlled by a mobile telephone in a range from 13 dBm to 43 dBm in steps of 2 dB. The output control method of the GSM system

0055060" 07055350

always controls the transmission output of a mobile telephone. That is, a mobile telephone controls its output according to the control signal sent from the base station periodically.

5 Referring to FIG. 1, when the control signal is received by the antenna, one of power control signals (1) - (N) is selected by an output control circuit included in the receiving circuit (10). This power control signal, with a pulse duty factor
10 corresponding to the time division, is a pulse signal with its peak corresponding to the voltage of the output power. It should be noted that the rise and the fall of the pulse is controlled so that the slope becomes gradual. The digital/analog converter is used
15 to control the slope of this rise and fall so that the signal rises and falls in response to the clock signal.

One of the power control amplifiers (8-1) - (8-N) receives the power control signal, generates the bias voltage so that the power control signal matches
20 the power sense output, and controls the output power Pout of one of the output stage amplifiers (3).

In this embodiment, in order to control a wide range of output power simply and precisely, the setting range of 13 dBm - 43 dBm is divided, for
25 example, into three (when N=3) and assigned to: a small output amplifier (3-1), a medium output amplifier (3-2), and a large output amplifier (3-3). In response to the signal from the base station specifying a medium

0055010-090500

output range, the receiving circuit (10) generates the power control signal (2) to activate only the power control amplifier (8-2). The power control signals (1) and (3) sent to the power control amplifiers (8-1) and (8-3) are set to zero to inactivate the bias voltage of the corresponding output stage amplifiers (3-1) and (3-3).

The power control signal (2) rises along the slope described above to a constant voltage corresponding to the peak power and, after a transmission time allocated according to the time division, falls along the similar slope. Because the bias voltage varies to make the power control signal (2) equal to the sense output, not only the peak power but also the slope of the rise and the fall of the transmission output can be controlled precisely.

When the control signal from the base station specifies a small output range or a large output range, the receiving circuit generates the power control signal (1) or (3) to activate only the power control amplifier (8-1) or (8-3) and inactivates other amplifiers. Selectively using the three output stage amplifiers in this manner makes possible highly efficient output and highly sensitive sense output.

FIG. 2 is a circuit diagram showing one embodiment of the output stage amplifier according to the present invention. The output stage amplifier comprises an output MOSFET(T1) and a sense MOSFET(T2)

that is $1/M$ of the MOSFET(T1) in size. The sources of the MOSFET(T1) and the MOSFET(T2) are at the ground potential, and the bias voltages are supplied from the gain control circuit (4) via resistors R1 and R2, respectively. A signal component is supplied to the gate of the output MOSFET(T1) via the power distribution circuit (2) and a coupling capacitor C1.

As described above, the gain of the MOSFET(T1) is determined by the mutual conductance g_m corresponding to the DC bias voltage supplied to the gate. Therefore, the sense MOSFET(T2), to which the same bias voltage is supplied, can generate the $1/M$ output of the output power of MOSFET(T1) from its drain as the sense output.

Because all output signal generated by the output MOSFET(T1) is outputted as a transmission signal in this configuration, a high power transmission output may be obtained even at a low voltage. The sense output may be set according to $1/M$. Thus, when the maximum output power of the output MOSFET(T1) is relatively small, $1/M$ is increased (M is decreased). Conversely, when the maximum output power of the output MOSFET(T1) is relatively large, $1/M$ is decreased (M is increased). In this way, the highly-sensitive sense output best suited for circuit control may be obtained according to the required output power.

FIG. 3 is a circuit diagram showing another embodiment of the output stage amplifier according to

the present invention. In this embodiment, two output stage circuits are used to increase the output range.

In this embodiment, the output power range is divided into two. An output MOSFET(T1) is composed of
5 a relatively small-sized MOSFET to cover a small-output power area. On the other hand, an output MOSFET(T3) is composed of a relatively large-sized MOSFET to cover a large-output power area. In this embodiment, a sense MOSFET(T2) is paired with the output MOSFET(T1), and a
10 sense MOSFET(T4) with the output MOSFET(T3). That is, there is a one to one correspondence between the output MOSFET and the sense MOSFET.

A bias voltage is supplied from the power control circuit (4) to the gates of the output
15 MOSFET(T1) and the sense MOSFET(T2) via the resistors R1 and R2. Similarly, another bias voltage is supplied from the power control circuit (4) to the gates of the output MOSFET(T3) and the sense MOSFET(T4) via the resistors R3 and R4. The input signal is supplied to
20 the gates of the output MOSFETs(T1) and (T3) via the coupling capacitors C1 and C2, and one of the drain outputs of the output MOSFETs(T1) and (T3) is selected via the matching circuit (6) for output. On the other hand, the drains of the sense MOSFETs(T2) and (T4) are
25 connected in common, and the drain output activated by the bias voltage is outputted from the common sense output terminal.

In this configuration, two output MOSFETs(T1)

and (T3) are used for the output range. Therefore, the characteristics of the bias voltage and the output power which have a higher output efficiency may be used.

5 FIG. 4 is a characteristics diagram of the relation between the detected current and the output power. This figure is used to describe an example of the power control method in which a plurality of MOSFETs, each having its own output capacity as
10 described above, are used. In the figure, the output power range is divided into three: small power, medium power, and large power.

Three output stage amplifiers are provided to cover the output power range. To allow the output
15 power to change smoothly from small power to large power, the amplifier is changed to the medium power output stage amplifier when the power range is not covered by the small power output stage amplifier. Similarly, the amplifier is changed to the large power
20 output stage amplifier when the power range is not covered by the medium power output stage amplifier. Conversely, when the sense current is small for the large power output stage amplifier and when a medium power output that cannot be controlled accurately by a
25 bias voltage with such a small sense current is indicated, switching is made to the medium power output stage amplifier.

In the GSM system, the output control signal

is sent from the base station to a mobile telephone periodically. Because the output stage amplifiers are switched between the output operations performed on a time division basis, no serious problem is generated during the power control operation described above.

FIG. 5 is a characteristics diagram showing the relation between the detected current and the output power. This figure is used to describe an example of power control method in which a plurality of MOSFETs, each having its own output capacity as described above, are used. In the figure, the output power range is divided into three: small power, medium power, and large power.

In this embodiment, one of three output stage amplifiers is selected based on the output control signal first specified at the start of communication by the base station for a mobile telephone. During the communication, output control is performed by the selected output stage amplifier. Because the output stage amplifiers are not switched in this configuration, the control of output stage amplifiers is simple. In general, because there is no considerable change in the output power of a mobile telephone during communication, the control method described above virtually presents no serious problem. That is, one of the small, medium, and large power output stage amplifiers is selected in consideration of an output power range covering output powers somewhat

smaller than and somewhat larger than the output power specified by the base station for a mobile telephone at the start of communication.

FIG. 6 is a circuit diagram showing another embodiment of an output stage amplifier according to the present invention. In this embodiment, an automatic switching function for operating a plurality of output stage MOSFETs at the same time is provided. That is, the output stage amplifier in this embodiment has an additional self-shutdown circuit.

Referring to the figure, one of the plurality of output stage amplifiers is shown as a representative amplifier. A plurality of output MOSFETs(T1) of the similar output stage amplifiers are connected in parallel via the output matching circuit (6). For example, in the circuit shown in FIG. 1, the receiving circuit supplies, at its maximum output time, the power control signal to the power control amplifiers (8-1) - (8-N) to activate all output stage amplifiers (3-1) to (3-N). The resistor R3 is provided between the drain of a sense MOSFET(T2) and a reference voltage Vref. The drain output voltage of the sense MOSFET(T2) is supplied to the gate of a shutdown MOSFET T3. The drain-source path of this MOSFET(T3) connects the gate to the source (ground potential of the circuit) of the output MOSFET(T1).

As the bias voltage is reduced by the specified output control signal, drain current flowing

through the sense MOSFET(T2) is reduced. This reduced drain current reduces the voltage drop across the resistor R3 and increases the gate voltage of the MOSFET(T3). When the gate voltage of the MOSFET(T3) becomes equal to or larger than the threshold voltage, the MOSFET(T3) is turned on and the output MOSFET(T1) is turned off. This inactivates the output MOSFET(T1), and the output operation of the other output MOSFETs, not shown, serves to generate the output signal.

Combined use of the size of the sense MOSFETs, each $1/M$ of the output MOSFET, and the setting of the resistance of the resistor R3 decides the threshold voltage of the shutdown MOSFET. Based on the threshold voltage of the shutdown MOSFET, the output MOSFET is predefined, for example, for each of the small power area, the medium power area, and the large power area to activate the self-shutdown circuit in order to switch the output power. The additional self-shutdown circuit cuts off the input signal to an inactive output MOSFET, thus reducing the output leakage.

In the above case, the plurality of output MOSFETs may be of the same size or their sizes may be determined with predetermined weights.

FIG. 7 is a diagram showing a basic configuration of one embodiment of a high frequency power amplifying circuit according to the present invention. The figure shows an output stage amplifier

circuit including an output MOSFET and a sense MOSFET as well as an element pattern corresponding to the circuit.

The output stage amplifier includes the

5 output amplifying MOSFET(T1), sense MOSFET(T2), resistors R1 and R2 for transferring the gain control bias voltage to the gates of the MOSFETs(T1) and (T2), and the coupling capacitor C1 for transferring the input signal Pin to the gate of the output MOSFET(T1).

10 A load resistor is provided between the Drain(1) of the output MOSFET(T1) and a power voltage Vcc. A sense resistor Rs is provided and connected to the Drain (2) of the sense MOSFET(T2) for conversion of a the current detected by the sense MOSFET(T2) to a voltage signal.

15 In the sense MOSFET(T2), a thin drain is formed between a pair of source areas indicated by thick vertical hatching areas as shown in the pattern diagram. A pair of gate electrodes, indicated by black areas, are provided between the source area and the

20 drain area. The two gate electrodes are connected to the gate line Gate(2) shown at the bottom. The drain area formed between the two gate electrodes is connected to the drain line Drain (2).

On the other hand, the output MOSFET(T1)

25 includes M sets of the source, drain and gate electrodes arranged horizontally. When the gate-source voltage is equal, the drain current flowing through the output MOSFET(T1) is M times as large as the drain

current flowing through the sense MOSFET(T2) because of this configuration. In other words, the current flowing through the sense MOSFET(T2) is $1/M$ of the output direct current flowing through the output MOSFET(T1). Because the drain current flowing through the output MOSFET(T1) corresponds to the transmission output power, the drain current flowing through the sense MOSFET(T2) also corresponds to the transmission output power.

The source area of the sense MOSFET(T2) and M sets of horizontally-arranged source areas of the output MOSFET(T1) are connected. They are at the ground potential of the circuit.

FIG. 8 is a circuit diagram showing another embodiment of a high frequency power amplifying circuit according to present invention. In this embodiment, the sensitivity may be changed. That is, in an output stage amplifier similar to the one shown in FIG. 7, a sense resistor connected to the drain line Drain(2) of the sense MOSFET(T2) comprises two resistors, R_{s1} and R_{s2} , connected in series. To obtain the sense output, a switch is provided to supply the voltage developed either across the resistors R_{s1} and R_{s2} connected in series or across the resistor R_{s1} to the amplifying circuit as the sense signal.

In an area where the output power of the output MOSFET(T1) is small, the current flowing through the drain of the sense MOSFET(T2) becomes small

accordingly. In this case, the switch is operated to use a large voltage developed across the resistors Rs1 and Rs2 connected in series.

In an area where the output power of the output MOSFET(T1) is large, the current flowing through the drain of the sense MOSFET(T2) becomes large accordingly. In this case, the switch is operated to use a voltage, developed across the resistor Rs1 only, as the sense voltage. Switching the sense voltage according to the output power in this manner allows a highly-sensitive sense output to be generated. However, it should be noted that the resistor switching like this requires the level of the power control signal to be switched accordingly.

FIG. 9 is a circuit diagram showing a still another embodiment of a high frequency power amplifying circuit according to the present invention. This embodiment also allows the sensitivity to be switched. That is, two sense MOSFETs(T2) and (T2') are provided in an output stage amplifier similar to the one shown in FIG. 7. The drain lines, Drain(2) and Drain(2'), of the sense MOSFETs(T2) and (T2') are connected to the sense resistor Rs1. The voltage of the gate of the added sense MOSFET(T2') is changed over by a switch, connected via the gate input resistor R3, between the gain control bias voltage and the ground potential of the circuit. This configuration allows one of two sense currents to be obtained: sense current generated

by the output MOSFET(T1) or the sense current doubled by the added sense MOSFET(T2').

In an area where the output power of the output MOSFET(T1) is small, the current flowing through the drain of the sense MOSFET(T2) becomes small accordingly. In this case, the switch is operated to generate the double current by supplying the bias voltage also to the sense MOSFET(T2').

In an area where the output power of the output MOSFET(T1) is large, the current flowing through the drain of the sense MOSFET(T2) becomes large accordingly. In this case, the switch is operated to turn off the sense MOSFET(T2') by supplying the ground potential to its gate. This allows the sense current generated only by the sense MOSFET(T2) to flow into the sense resistor Rs1. Switching the sense current according to the output power in this manner allows a highly-sensitive sense output to be generated. However, it should be noted that the switching of the sense MOSFET(T2') described above requires the level of the power control signal to be switched accordingly.

FIG. 10 is a characteristics diagram showing the relation between the output power and the detected current. This figure describes an example of the operation of the high frequency power amplifying circuit according to the present invention. This characteristics diagram corresponds to the operation of the high frequency power amplifying circuit shown in

FIG. 8 and FIG. 9. The switch Rs for insertion of the series-connected sense resistor Rs2 or the switch N for addition of the sense MOSFET(T2') serves to maintain high sensitivity even in a small power area as in a large power area.

FIG. 11 is a circuit diagram of a still another embodiment of a high frequency power amplifying circuit according to the present invention. In this embodiment, the input signal Pin is supplied also to the sense MOSFET(T2). That is, the gate of the output MOSFET(T1) and the gate of the sense MOSFET(T2), which are connected, receive the gain control bias voltage via the resistor R1. The input signal Pin is supplied to the gates of the output MOSFET(T1) and the sense MOSFET(T2) via the coupling capacitor C1. This configuration causes the signal component to flow into the drain output of the sense MOSFET(T2). This signal is smoothed by a capacitor, provided in parallel to the sense resistor Rsl, to generate a sense voltage more accurately proportional to the drain power of the output MOSFET(T1).

FIG. 12 is a block diagram of a still another embodiment of a high frequency power amplifying circuit according to the present invention. In this embodiment, a three-stage amplifier configuration, composed of a first-stage amplifier A1, a next-stage amplifier A2, and an output stage amplifier A3, is used to provide a high gain in the high frequency power

amplifying stage. In this case, the first-stage amplifier A1 and the next-stage amplifier A2 each comprise an amplifying MOSFET only, while only the output stage amplifier A3 comprises the output

5 MOSFET(T1) and the sense MOSFET(T2). The gain control bias voltage generated based on the signal detected by the sense MOSFET(T2) in the output stage amplifier is supplied to the first-stage amplifier A1, the next-stage amplifier A2, and the output stage amplifier A3.

10 In this configuration, the whole power control, including compensation for manufacturing process variations in the first-stage amplifier A1 and the next-stage amplifier A2, may be performed based on the output sense voltage from the largest-power output
15 stage amplifier and the power control corresponding thereto. Because the output signal from the MOSFETs in the first-stage amplifier A1 and the next-stage amplifier A2 is small, the MOSFET size may be determined according to the output level.

20 FIG. 13 is an entire block diagram showing an embodiment of a mobile communication apparatus according to the present invention. A most typical example of the mobile communication apparatus is a mobile telephone.

25 The signal received by the antenna is amplified by the receiving front end, converted by the mixer into an intermediate frequency wave, and transferred to the voice processing circuit via the

005060" 0T05560

intermediate signal processing circuit IF-IC. The gain control signal periodically included in the received signal is processed, for example, as described below. That is, the gain control signal is decoded by the microprocessor CPU, the power control signal composed of pulses according to the pulse duty factor corresponding to the time division is generated, and the generated signal is transferred to a high frequency power amplifying circuit such as the one according to the present invention, for performing the power control of transmission output.

The frequency synthesizer generates the oscillation signal, corresponding to the received frequency, using the reference oscillation circuit TCXO, voltage control oscillation circuit VCO, and the PLL loop and, at the same time, transfers the oscillation signal to the mixer in the reception front end. The oscillation signal is also fed to the modulator.

In the voice processing circuit, the received signal activates the receiver for generation of a voice signal. The transmission voice is converted to an electrical signal by the microphone and transferred to the modulator via the voice processing circuit and the modem.

The embodiments described above have the following effects:

(1) A first amplifying element and a second

amplifying element of the same structure as the above first amplifying element and being reduced to $1/M$ in element size are used, the above first amplifying element and the second amplifying element are supplied
5 with the same bias voltage from a power control circuit, and the power output of the above first amplifying element is estimated based on the output current outputted from the output terminal of the above second amplifying element. This high frequency power
10 amplifying circuit can precisely detect the power in a wide power range while maintaining high transmission efficiency.

(2) There are a plurality of first amplifying elements and the number of first amplifying elements to
15 be activated in parallel in response to control signals from said power control circuit is increased or decreased. This configuration allows the high frequency power amplifying circuit to efficiently cover a wide range of output power.

(3) There are a plurality of said first
20 amplifying elements, each having its own size, and one of said plurality of said first amplifying elements is selectively activated in response to an output control signal corresponding to a control signal from said
25 power control circuit. This configuration allows the high frequency power amplifying circuit to efficiently cover a wide range of output power.

(4) There are a plurality of second amplifying

005060"0705550

elements, each corresponding to one of first amplifying elements, and the plurality of second amplifying elements are activated in parallel to output sense signals in accordance with first amplifying elements
5 activated in response to the control signals from the power control circuit. This configuration allows the sense output signal to be output corresponding to the output power switching.

(5) There are a plurality of second amplifying
10 elements, each corresponding to one of first amplifying elements, and the second amplifying element corresponding to one of first amplifying elements activated in response to the control signal from said power control circuit is activated. This configuration
15 allows the sense signal to be output corresponding to the output power switching.

(6) The first amplifying elements and the second amplifying elements are formed on the same semiconductor substrate. This allows the sense output
20 signal to be generated precisely without being affected by process variations.

(7) The output current output from the output terminal of the second amplifying element selectively flows through a plurality of series resistors under
25 control of a switch controlled by the output current detection sensitivity switching signal. This configuration allows high sensitivity to be maintained even in a small power area as in a large power area.

(8) There are a plurality of second amplifying elements whose output terminals are connected, and the control signal is selectively supplied under control of a switch controlled by the output current sensitivity
5 switching signal. This configuration allows high sensitivity to be maintained even in a small power area as in a large power area.

(9) The input signal supplied to the input of the first amplifying element is supplied also to the input
10 terminal of the second amplifying element, and the output current of the second amplifying element changes the input signal to a direct current for use as the detection current. This enables power to be controlled precisely.

15 (10) The first amplifying element constitutes an output stage amplifier of a multi-stage amplification circuit whose preceding stages are composed of one or more vertically connected amplifiers, the second amplifying element is provided corresponding to the
20 first amplifying element constituting the output stage amplifier, and the control signal generated by the power control circuit is supplied to the amplifiers vertically connected in the stages. This simple configuration allows output power control, including
25 compensation for manufacturing process variations in the preceding stages, to be performed.

(11) The high frequency power MOSFET, used in the first amplifying element and the second amplifying

005060"0F05550

element, eliminates the need for a negative voltage which would be required for a GaAs MOSFET. Because of this, the circuit is easy to use and, in addition, may be operated by a low voltage battery such as a lithium ion battery.

- (12) Applying this invention to a battery-operated high frequency power amplifying circuit prolongs the battery life. In other words, the circuit may be used for communication longer on one battery charge.
- 10 (13) Controlling the high frequency power amplifying circuit according to the present invention with the use of the control signal included in the signal received from the base station and operating an electronic circuit, such as a reception/transmission
- 15 circuit or a control circuit including the high frequency power amplifying circuit, make available a mobile communication apparatus that may be used longer on one battery charge.

- (14) Using a lithium ion battery as the battery
- 20 described above makes available a compact, lightweight mobile communication apparatus that may be used longer on one battery charge.

While the preferred embodiments of the invention invented by the inventor have been described,

25 it is to be understood that the present invention is not limited to the embodiments but that modifications will be apparent to those skilled in the art without departing from the spirit of the present invention.

Any digital mobile telephone may be used as long as its output power is controlled by the control signal from the base station such as a telephone in the CDMA (code division multiple access) system. For example, in the

5 CDMA system, power control is performed through accurate feedback from the base station to a mobile telephone. In addition, in a system such as the IS-136 system or AMPS system where output power control is not so important, the high frequency power amplifying

10 circuit according to the present invention increases transmission efficiency. The mobile communication apparatus is not limited to an apparatus such as a telephone that sends and receives voice signals. The mobile communication apparatus may also be an apparatus

15 that converts digital signals to signals in the voice signal frequency band for sending digital signals to, and receiving digital signals from, personal computers or other similar mobile communication apparatuses via a digital telephone exchange network.

20

INDUSTRIAL APPLICABILITY

As described above, the present invention may be applied widely to a high frequency power amplifying circuit and a mobile communication apparatus using it.

CLAIMS

1. A high frequency power amplifying circuit comprising:
- a first amplifying element;
 - a second amplifying element of the same structure as said first amplifying element, an element size of said second amplifying element being $1/M$ of said first amplifying element; and
 - a power control circuit supplying an identical bias voltage to said first amplifying element and said second amplifying element,
- wherein a power output of said first amplifying element is judged based on an output current from an output terminal of said second amplifying element.
2. A high frequency power amplifying circuit according to claim 1, wherein a plurality of said first amplifying elements are provided and a number of said first amplifying elements to be activated in parallel in response to control signals from said power control circuit is increased or decreased.
3. A high frequency power amplifying circuit according to claim 1, wherein a plurality of said first amplifying elements are provided, each having its own size, and one of said plurality of said first amplifying elements is selected and activated in response to an output control signal corresponding to a control signal from said power control circuit.

005060-070550

4. A high frequency power amplifying circuit according to claim 2, wherein a plurality of said second amplifying elements are provided, each corresponding to one of said first amplifying elements, and said plurality of second amplifying elements are activated in parallel in accordance with said first amplifying elements activated in response to the control signals from said power control circuit.

5. A high frequency power amplifying circuit according to claim 3, wherein a plurality of said second amplifying elements are provided, each corresponding to one of said first amplifying elements, and said second amplifying element corresponding to one of said first amplifying elements activated in response to the control signal from said power control circuit is activated.

6. A high frequency power amplifying circuit according to claim 4, wherein said first amplifying elements and said second amplifying elements are formed on an identical semiconductor substrate.

7. A high frequency power amplifying circuit according to claim 5, wherein said first amplifying elements and said second amplifying elements are formed on an identical semiconductor substrate.

8. A high frequency power amplifying circuit according to claim 1, wherein an output current output from an output terminal of said second amplifying element selectively flows through a plurality of series

005050" 0705550

resistors under control of a switch controlled by an output current detection sensitivity switching signal.

9. A high frequency power amplifying circuit according to claim 1, wherein a plurality of said second amplifying elements are provided having output terminals connected in common, and said control signal is selectively supplied under control of a switch controlled by an output current sensitivity switching signal.

10. A high frequency power amplifying circuit according to claim 1, wherein an input signal supplied to an input of said first amplifying element is supplied also to an input terminal of said second amplifying element and an output current of said second amplifying element is a detected current obtained through conversion of the input signal to a direct current.

11. A high frequency power amplifying circuit according to claim 1,

wherein said first amplifying element constitutes an output stage amplifier of a multi-stage amplification circuit whose preceding stages are composed of one or more amplifying elements connected in tandem,

wherein said second amplifying element is provided corresponding to the first amplifying element constituting said output stage amplifier, and

wherein a control signal generated by said

005060" 0705560

power control circuit is supplied to the amplifiers vertically connected in the stages.

12. A high frequency power amplifying circuit according to claim 1, wherein said first and second amplifying elements are MOSFETs.

13. A high frequency power amplifying circuit according to claim 1, wherein said first amplifying element is operated by a battery voltage.

14. A mobile communication apparatus comprising:
a high frequency power amplifying circuit including a first amplifying element, a second amplifying element of the same structure as said first amplifying element, an element size of said second amplifying element being $1/M$ of said first amplifying element, and a power control circuit supplying an identical bias voltage to said first amplifying element and said second amplifying element, wherein a power output of said first amplifying element is judged based on an output current from an output terminal of said second amplifying element;

a control circuit supplying an output power control instruction to said power control circuit based on a control signal included in a signal received from a base station; and

a rechargeable battery supplying an operation voltage to an electric circuit including said high frequency power amplifying circuit and said control circuit.

00505030.005050

15. A mobile communication apparatus according to claim 14, wherein said battery is a lithium ion battery.

005050" 0705550

ABSTRACT

A high frequency power amplifying circuit in which a first amplifying element and a second amplifying element of the same structure as the above first amplifying element and being reduced to $1/M$ in element size are used, the above first amplifying element and the second amplifying element are supplied with the same bias voltage from a power control circuit, and the power output of the above first amplifying element is judged based on the output current outputted from the output terminal of the above second amplifying element.

005060 07059500

09/555010

1/8

FIG. 1

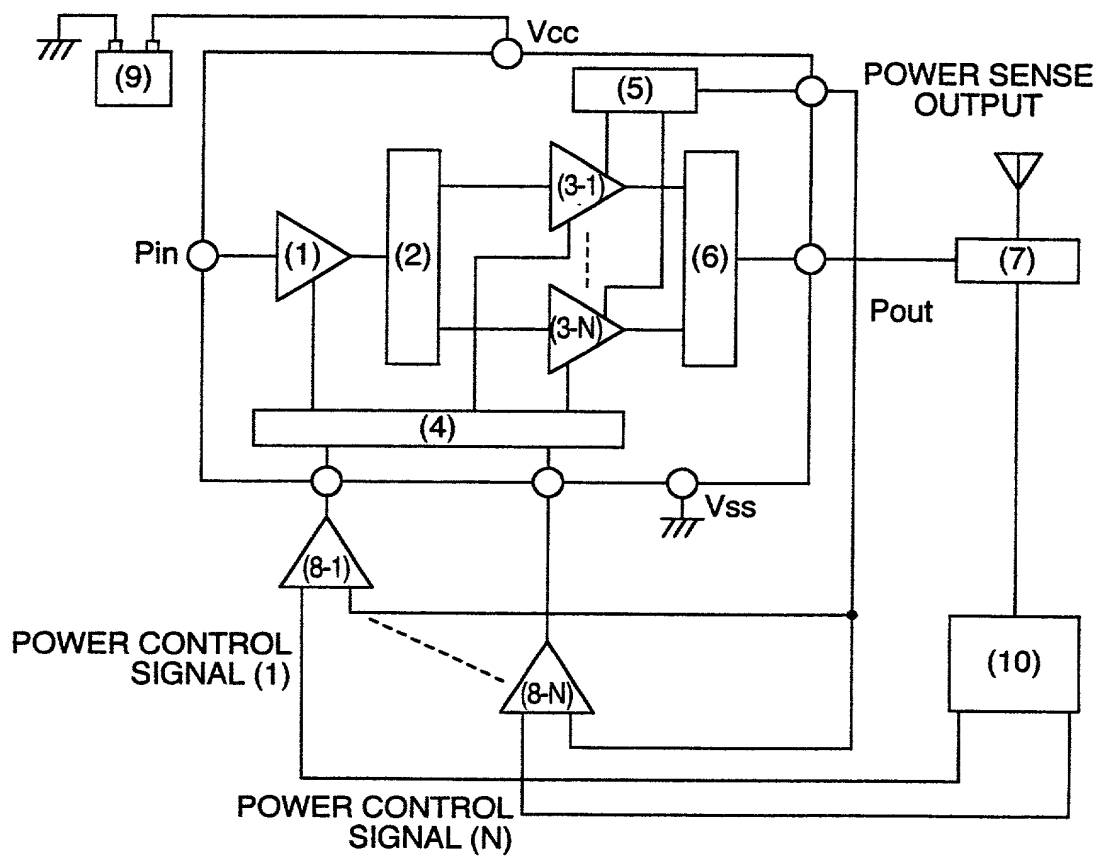


FIG. 2

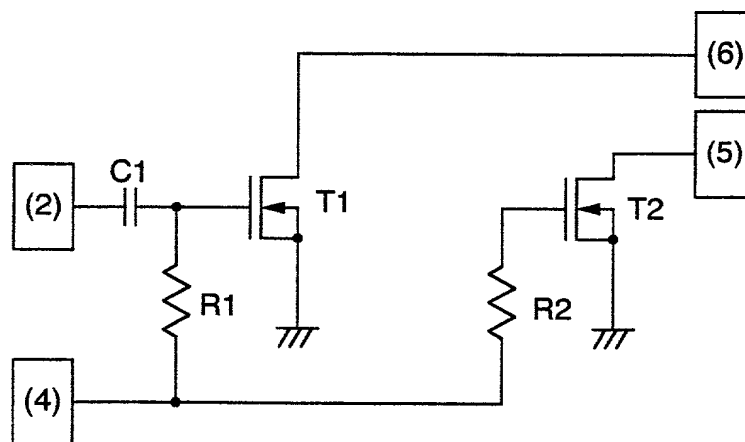


FIG. 3

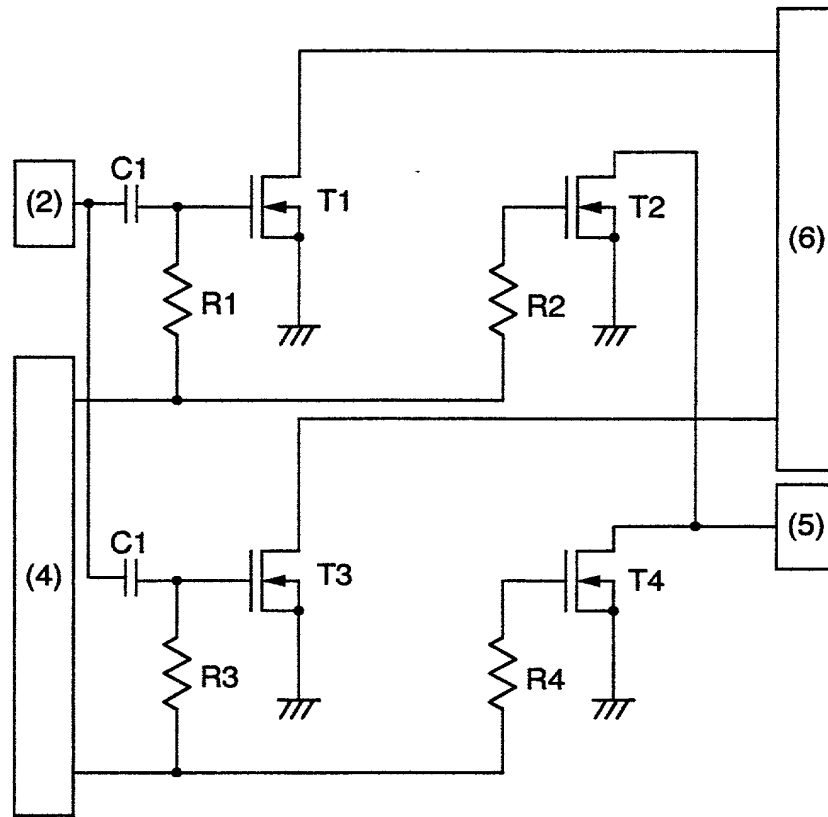


FIG. 4

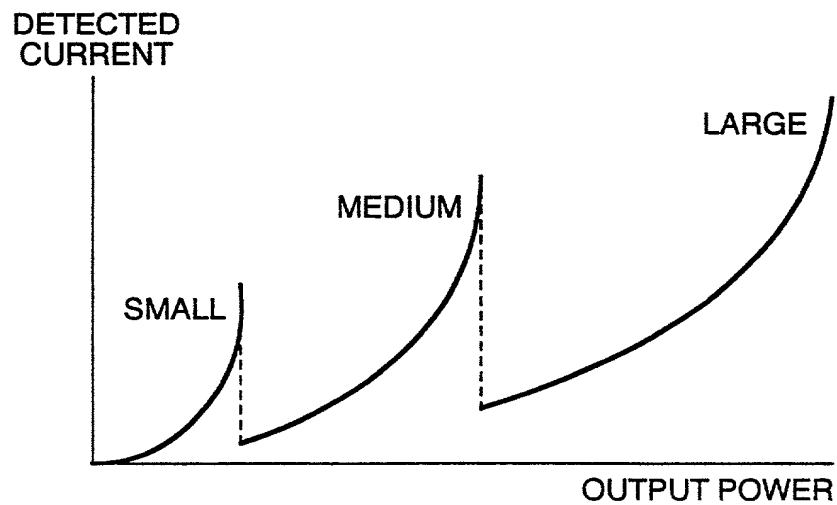


FIG. 5

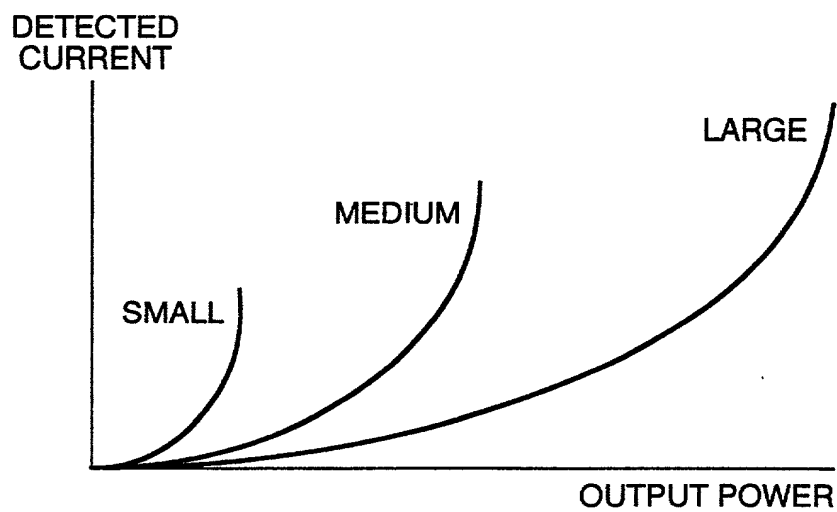


FIG. 6

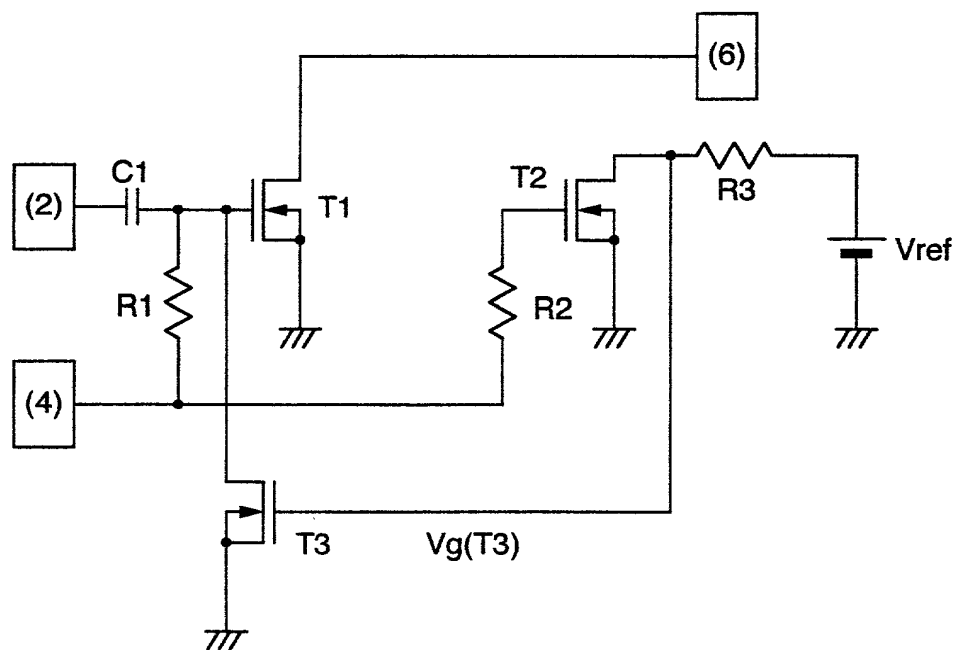


FIG. 7

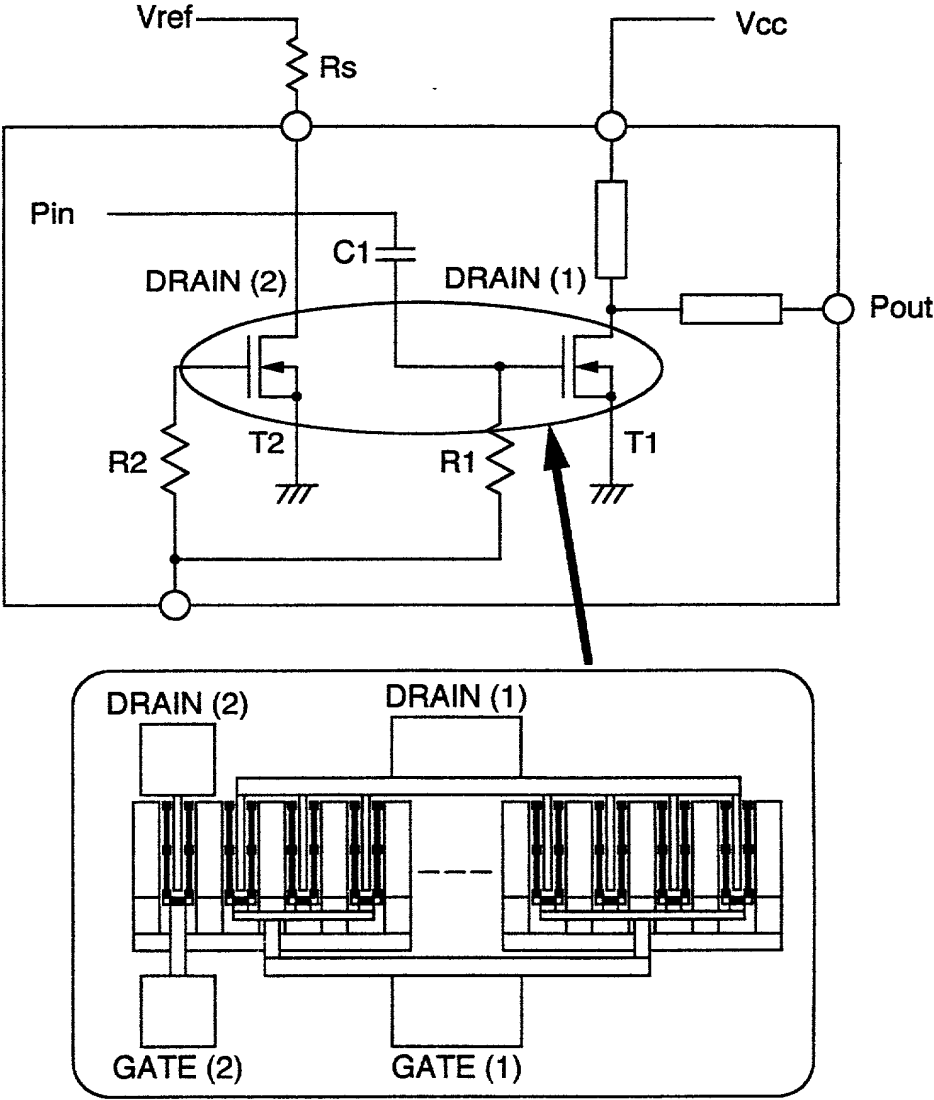


FIG. 8

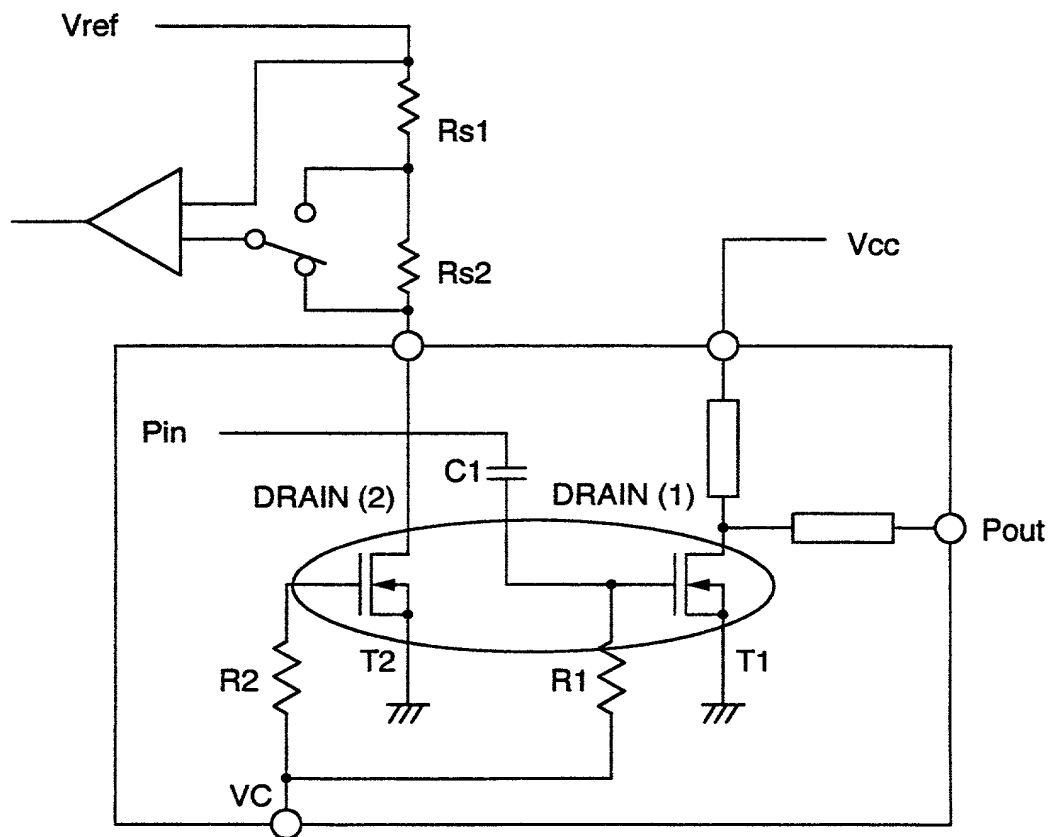


FIG. 9

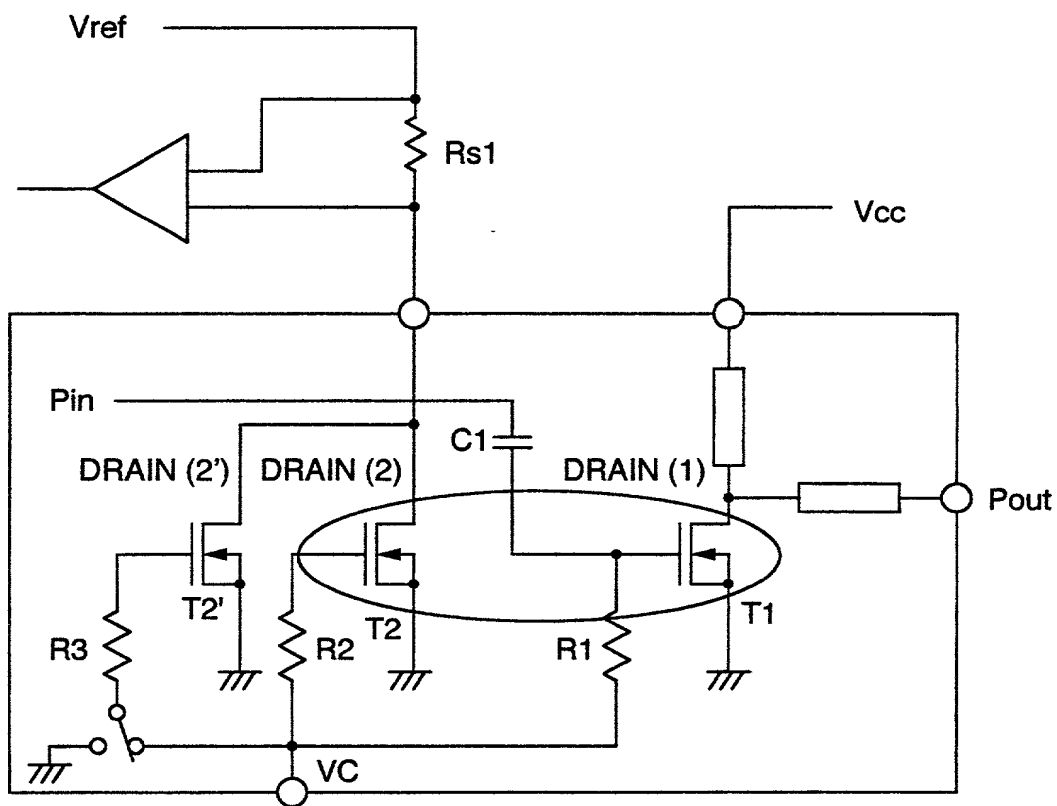


FIG. 10

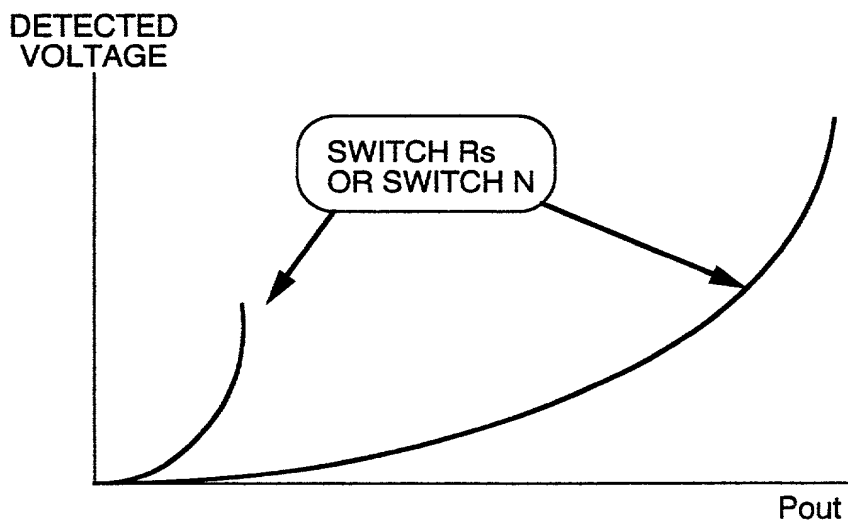


FIG. 11

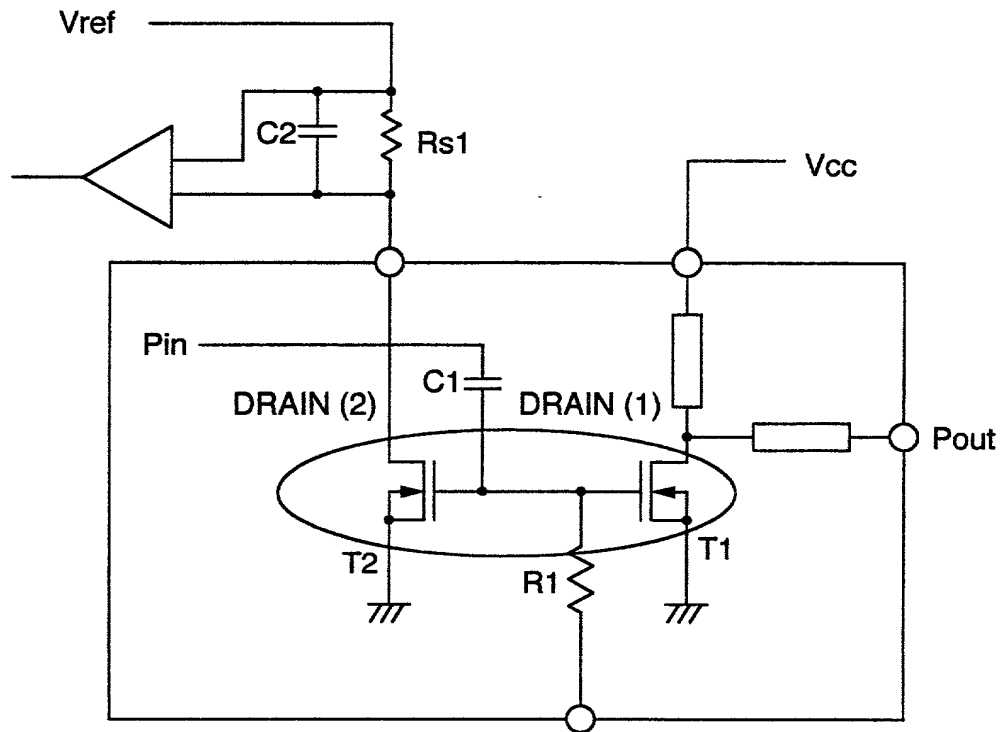


FIG. 12


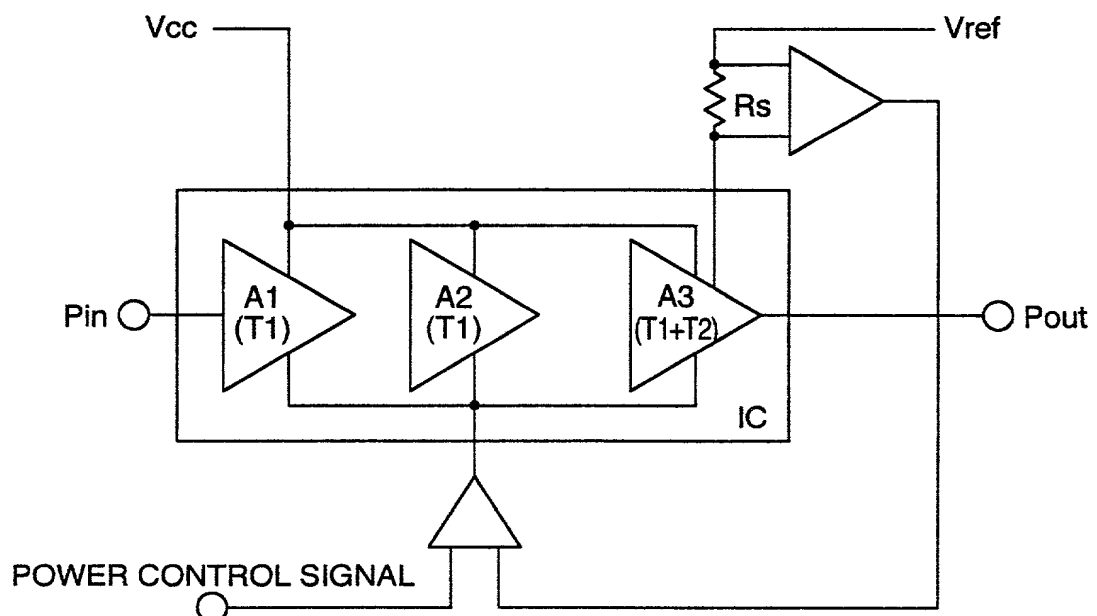


FIG. 13

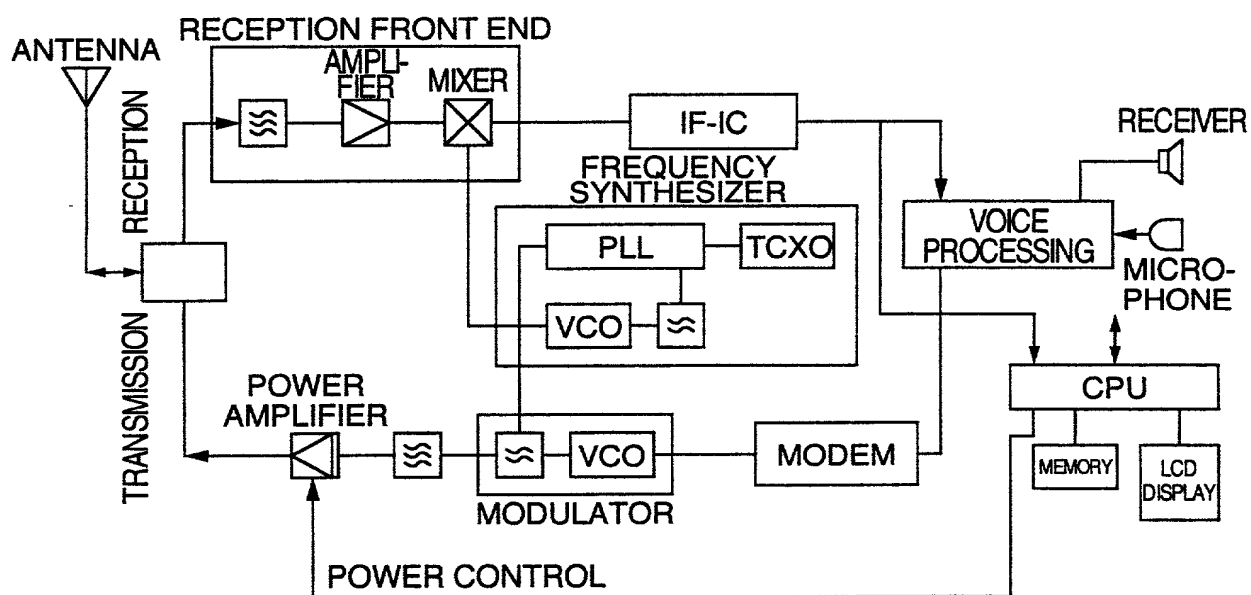

E5245-01(米)

PTO/SB/106(8-96)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

下記の氏名の発明者として、私は以下の通り宣言します。

As a below named inventor, I hereby declare that:

私の住所、私書箱、国籍は下記の私の氏名の後に記載された通りです。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明に関して請求範囲に記載され、特許出願している発明内容について、私が最初かつ唯一の発明者（下記の氏名が一つの場合）もしくは最初かつ共同発明者であると（下記の名称が複数の場合）信じています。

I believe I am the original first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

HIGH FREQUENCY POWER AMPLIFYING CIRCUIT,

AND MOBILE COMMUNICATION APPARATUS USING IT

上記発明の明細書（下記の欄で×印がついていない場合は、本書に添付）は、

The specification of which is attached hereto unless the following box is checked:

☐ __月__日に提出され、米国出願番号または特許協定条約国際出願番号を____とし、
(該当する場合) _____に訂正されました。


☒ was filed on November 28, 1997
as United States Application Number or
PCT International Application Number
PCT/JP97/04356 and was amended on
_____ (if applicable).

私は、特許請求範囲を含む上記訂正後の明細書を検討し、内容を理解していることをここに表明します。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第37編第1条56項に定義されたとおり、特許資格の有無について重要な情報を開示する義務があることを認めます。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.



E5-45-0(1*)

PTO/SB/106(8-96)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

私は、米国法典第35編119条(a)-(d)項又は365条(b)項に基づき下記の、米国以外の国の少なくとも一カ国を指定している特許協力条約365(a)項に基づき国際出願、又は外国での特許出願もしくは発明者証の出願についての外国優先権をここに主張するとともに、優先権を主張している、本出願の前に出願された特許または発明者証の外国出願を以下に、枠内をマークすることで、示している。

Prior Foreign Application(s)
外国での先行出願

(Number) (番号)	(Country) (国名)
(Number) (番号)	(Country) (国名)

I hereby claim foreign priority under Title 35, United States Code, Section 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Priority Not Claimed
優先権主張なし

(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>
(Day/Month/Year Filed) (出願年月日)	<input type="checkbox"/>

私は、第35編米国法典119条(e)項に基づいて下記の米国特許出願規定に記載された権利をここに主張いたします。

I hereby claim the benefit under Title 35, United States Code, Section 119(e) of any United States provisional application(s) listed below.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

私は、下記の米国法典第35編120条に基づいて下記の米国特許出願に記載された権利、又は米国を指定している特許協力条約365条(c)に基づき権利をここに主張します。また、本出願の各請求範囲の内容が米国法典第35編112条第1項又は特許協力条約で規定された方法で先行する米国特許出願に開示されていない限り、その先行米国出願書提出日以降で本出願書の日本国内または特許協力条約国際提出日までの期間中に入手された、連邦規則法典第37編1条56項で定義された特許資格の有無に関する重要な情報について開示義務があることを認識しています。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365(c) of any PCT international application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of application.

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)

(Application No.) (出願番号)	(Filing Date) (出願日)
-----------------------------	------------------------

(Status: Patented, Pending, Abandoned) (現況: 特許許可済、係属中、放棄済)

私は、私自身の知識に基づいて本宣言書中で私が行なう表明が真実であり、かつ私の入手した情報と私の信じることに基づき表明が全て真実であると信じていること、さらに故意になされた虚偽の表明及びそれと同等の行為は米国法典第18編第1001条に基づき、罰金または拘禁、もしくはその両方により処罰されること、そしてそのような故意による虚偽の声明を行えば、出願した、又は既に許可された特許の有効性が失われることを認識し、よってここに上記のごとく宣誓を致します。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

E5245-01
(*)

PTO/SB/106(8-96) (Modulated spacing)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

Japanese Language Declaration
(日本語宣言書)

委任状： 私は下記の発明者として、本出願に関する一切の手続きを米特許商標局に対して遂行する弁理士または代理人として、下記の者を指名いたします。(弁護士、または代理人の氏名及び登録番号を明記のこと)

(7)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith (list name and registration number)

Thomas E. Beall, Jr., Reg. No. 22,410; John R. Mattingly, Reg. No. 30,293; Daniel J. Stanger, Reg. No. 32,846; Shrinath Malur, Reg. No. 34,663; Gene W. Stockman, Reg. No. 21,021; Jeffrey M. Ketchum, Reg. No. 31,174; and Scott W. Brickner, Reg. No. 34,553.

書類送付先

Send Correspondence to:

BEALL LAW OFFICES

104 East Hume Avenue

Alexandria, Virginia 22301

直接電話連絡先：(氏名及び電話番号)

Direct Telephone Calls to: (name and telephone number)

Telephone: (703) 684-1120

Fax: (703) 684-1157

唯一または第一発明者	1-00	Full name of sole or first inventor Yasuhiro NUNOGAWA
発明者の署名	日付	Inventor's signature Date Yasuhiro Nunogawa 22/May/2000
住所		Residence Takasaki, Japan JPT
国籍		Citizenship Japan
私書箱		Post Office Address c/o Hitachi, Ltd., Intellectual Property Group New Marunouchi Bldg. 5-1, Marunouchi 1-chome, Chiyoda-ku, Tokyo 100-8220, Japan

(第二以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for second and subsequent joint inventors.)

→

E5245-01(※)

PTO/SB/106(8-96)

Approved for use through 9/30/98. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

第二共同発明者		Full name of second joint inventor, if any	
2-0		Tetsuaki ADACHI	
第二共同発明者の署名	日付	Second inventor's signature	Date
		Tetsuaki Adachi	22/May/2000
住所		Residence	
		Toubumachi, Japan JPX	
国籍		Citizenship	
		Japan	
私書箱		Post Office Address	
		c/o Hitachi Tohbu Semiconductor, Ltd. 1-1, Nishiyokote-machi, Takasaki-shi, Gunma 370-0021, Japan	
第三共同発明者		Full name of third joint inventor, if any	
第三共同発明者の署名		Third inventor's signature	Date
日付			
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第四共同発明者		Full name of fourth joint inventor, if any	
第四共同発明者の署名		Fourth inventor's signature	Date
日付			
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	
第五共同発明者		Full name of fifth joint inventor, if any	
第五共同発明者の署名		Fifth inventor's signature	Date
日付			
住所		Residence	
国籍		Citizenship	
私書箱		Post Office Address	

0055010 090500